



WILD FS M20.

IN DIESEN FARBEN VORHANDEN:



ICE GREEN (GLOSS)-BLACK
(MATT)




RED WINE CARBON
(GLOSS)-CARBON RAW
(MATT)

TECHNISCHE EIGENSCHAFTEN UND OPTIONEN

| | |
|----------------------------|---|
| RAHMEN | ORBEA WILD Full Suspension 2020 Carbon 160mm Travel FRONT TRIANGLE: Carbon, REAR TRIANGLE: Aluminum, AlloyLink, BATTERY COVER: Polymer, Boost 12x148 Bosch Gen4 |
| DÄMPFER | Fox Float DPS Performance Trunnion 3-Position Evol LV custom tune 205x65mm Fox Float X2 Factory Trunnion 2-Pos Kashima cm tune 205x65mm |
| GABEL | Fox 38 Float Performance 160 Grip 3-Position QR15x110 E-Bike Optimized Fox 38 Float Factory 160 Grip2 QR15x110 Kashima for E-Bike |
| KURBEL | PW-NW32-G4 |
| PEDALARM | e*thirteen Plus Alu |
| STEUERSATZ | OC Key Holder |
| LENKER | OC1 35mm 12mm Rise 780mm |
| VORBAU | OC1 3D Forged 35mm interface 7° |
| HEBEL | Shimano Deore M6100 |
| BREMSEN | Shimano MT420 Hydraulic Disc Shimano XT M8120 Hydraulic Disc |
| KASSETTE | Shimano CS-M7100 10-51t 12-Speed |
| SCHALTWERK | Shimano XT M8100 SGS Shadow Plus |
| KETTE | Shimano M6100 |
| LAUFRADSATZ | Race Face AR 30c Tubeless Ready |
| REIFEN | Maxxis Minion DHF 2.60" 120 TPI FB 3C Maxx Terra Exo+ TR |
| REIFEN | Maxxis Minion DHR II 2.60" 120 TPI FB 3C Maxx Terra Exo+ TR |
| SATTELSTÜTZE | OC Mountail Control MC20, 31,6mm, Dropper OC MC20 Mountain Control Dropper, 31,6mm, 125mm travel OC MC20 Mountain Control Dropper, 31,6mm, 150mm travel OC MC20 Mountain Control Dropper, 31,6mm, 170mm travel |
| SATTELSTÜTZE REMOTE | OC Horizontal |
| SATTEL | Selle Royal Vivo 145x269mm |
| SCHEINWERFER | Lezyne MACRO DRIVE X lock (front)+Lezyne FEMTO STVZO (rear) |
| SCHLOSS | Abus battery powertube lock PLUS |
| KETTENFÜHRUNG | Orbea OC chainguide 32-38t |
| MOTOR | BOSCH Performance CX Cruise (25km/h) BDU450CX |
| AKKU | BOSCH Powertube 625Wh Horizontal BBP290 |
| DUAL BATTERY | Dual Battery conection (no battery) |
| DISPLAY | BOSCH Performance Purion BOSCH Display unit KIOX Black BUI330 |
| LADEGERÄT | Compact Charger 2A (100-240V) Worldwide Fast Charger 6A (220-240V) |

GOMETRIE

| GRÖßE | S/M | L/G | XL |
|-------------------------|------|-------|------|
| 1 - SEAT_TUBE | 406 | 444 | 483 |
| 2 - TOP_TUBE | 585 | 612 | 645 |
| 3 - HEAD_TUBE | 100 | 110 | 125 |
| 4 - CHAIN_STAY | | 455 | |
| 5 - BB_HEIGHT | | 345 | |
| 6 - BB_DROP | | 30 | |
| 7 - WHEELBASE | 1203 | 1232 | 1268 |
| 8 - HEAD_ANGLE | | 65,5° | |
| 9 - SEAT_ANGLE | | 76° | |
| 10 - STANDOVER | 725 | 740 | 765 |
| 11 - REACH | 430 | 455 | 485 |
| 12 - STACK | 621 | 630 | 644 |
| 13 - FORK_LENGTH | | 570 | |
| 14 - OFFSET | | 44 | |

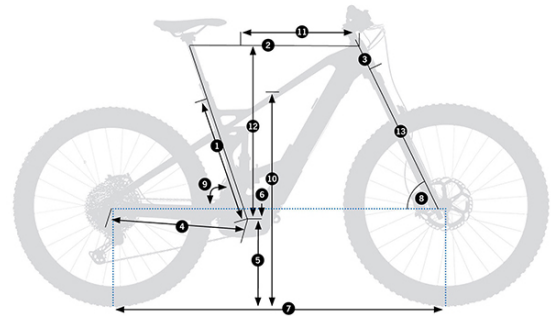

ERGONOMIE

| GRÖßE | KURBELLÄNGE | VORBAU | LENKER | LÄNGE VARIOSTÜTZE |
|-------|-------------|--------|--------|-------------------|
| S/M | 160 | 55 | 780 | 390/125 |
| L | 160 | 55 | 780 | 440/150 |
| XL | 160 | 55 | 780 | 480/170 |

* Das Lenkermaß ist Mitte-Mitte